

MV-SC3030XC

3 MP Color Vision Sensor



Introduction

With built-in high-precision vision algorithms, MV-SC3030XC vision sensor can realize counting, existence, measurement, recognition and other functions. It can be easily configured and operated via the SCMVS client software, and it uses RS-232 and Ethernet to output vision tool results and customized results.

Applicable Industry

Consumer electronics, food and pharmaceutical, automobile, etc.

Available Model

- 8 mm focal length: MV-SC3030XC-08M-WBN
- 12 mm focal length: MV-SC3030XC-12M-WBN
- 16 mm focal length: MV-SC3030XC-16M-WBN

Key Features

- Adopts embedded hardware platform to realize high-speed image processing.

- Built-in high-precision positioning, measurement and recognition algorithms for counting, defects, existence, positioning and other functions.
- Supports RS-232, TCP, UDP, FTP, Modbus, PROFINET, EtherNet/IP and other communication modes.
- Adopts multiple IO interfaces for input and output signals.
- Supports viewing the device's status in real time via 360° visual indicator, convenient for debugging and maintenance.
- Rotatable cable tail design, suitable for narrow space.
- Adopts polarized, diffused, and full-transparent multiple optical lighting with good environmental adaptability.
- IP67 protection without fear of harsh industrial application environments.

Specification

Model	MV-SC3030XC-08M-WBN	MV-SC3030XC-12M-WBN	MV-SC3030XC-16M-WBN
Tool			
Vision tool	● Measurement: P2P measurement, P2L measurement, contrast measurement, grayscale size, edge width measurement, width measurement, brightness analysis, L2L angle, color measurement, color size, diameter measurement, line angle ● Existence: Spot existence, edge existence, contour existence, pattern existence, circle existence, line existence, anomaly judge, existence detection ● Count: Spot count, edge count, contour count, pattern count, learning-based count, color count ● Recognition: Multi-object count, code recognition, color contrast, color recognition, category recognition, classification registration, object detection registration, OCR ● Logic: Calculator, If module, logic judge, format output, condition judge, character comparison, combination judge ● Location: Calibration convert, single point alignment, point rectify, point grasp, scale transformation, fixture ● Deep learning: DL classification, DL object detection ● Defect detection: Anomaly detection		
Solution capacity	Supports importing and exporting project, up to 32 projects can be stored		
Communication protocol	RS-232, TCP, UDP, FTP, PROFINET, Modbus, EtherNet/IP, MELSEC/SLMP, FINS, Keyence KV		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.45 μm × 3.45 μm		
Sensor size	1/1.8"		
Resolution	2048 × 1536		
Max. frame rate	40 fps		
Dynamic range	77.8 dB		
SNR	43 dB		
Gain	0 dB to 15 dB		
Exposure time	6 μs to 1 sec		
Pixel format	RGB 8, Mono 8		
Mono/color	Color		
Electrical feature			
Data interface	Fast Ethernet (100 Mbit/s)		
Digital I/O	12-pin M12 connector provides power and I/O, including opto-isolated input (LINE 0/1/2) × 3, opto-isolated output (LINE 3/4/5) × 3, and RS-232 × 1 Supports triggering device via pressing top trigger button		
Power supply	24 VDC		
Power consumption	Approx. 6.5 W @ 24 VDC		
Mechanical			
Lens mount	M12-mount, mechanical autofocus supported		
Focal length	8 mm (0.3")	12 mm (0.5")	16 mm (0.6")
Lens cap	Polarized + diffused + full-transparent lens cap		
Light source	White spot light source. Red/blue/IR point light source is optional		
Aiming system	Orange LED		
Indicator	360° visual indicator		
Dimension	Straight angle: 80.1 mm × 43 mm × 44.3 mm (3.2" × 1.7" × 1.7") Right angle: 58.5 mm × 43 mm × 65.4 mm (2.3" × 1.7" × 2.6")		
Weight	Approx. 190 g (0.4 lb.)		

Specification


Model	MV-SC3030XC-08M-WBN	MV-SC3030XC-12M-WBN	MV-SC3030XC-16M-WBN
Ingress protection	IP67 (under proper installation of waterproof lens cap)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
Humidity	20% RH to 95% RH (no condensation)		
General			
Client software	SCMVS		
Certification	CE, KC		

Detection Range


Lens focal length	Installation distance	Field of View	Single Pixel Accuracy
8 mm	25 mm	22.08 mm × 16.56 mm	0.011 mm
	2000 mm	1766.40 mm × 1324.80 mm	0.863 mm
12 mm	60 mm	35.33 mm × 26.50 mm	0.017 mm
	2000 mm	1177.60 mm × 883.20 mm	0.575 mm
16 mm	100 mm	44.16 mm × 33.12 mm	0.022 mm
	2000 mm	883.20 mm × 662.40 mm	0.431 mm



Vertical FoV / mm

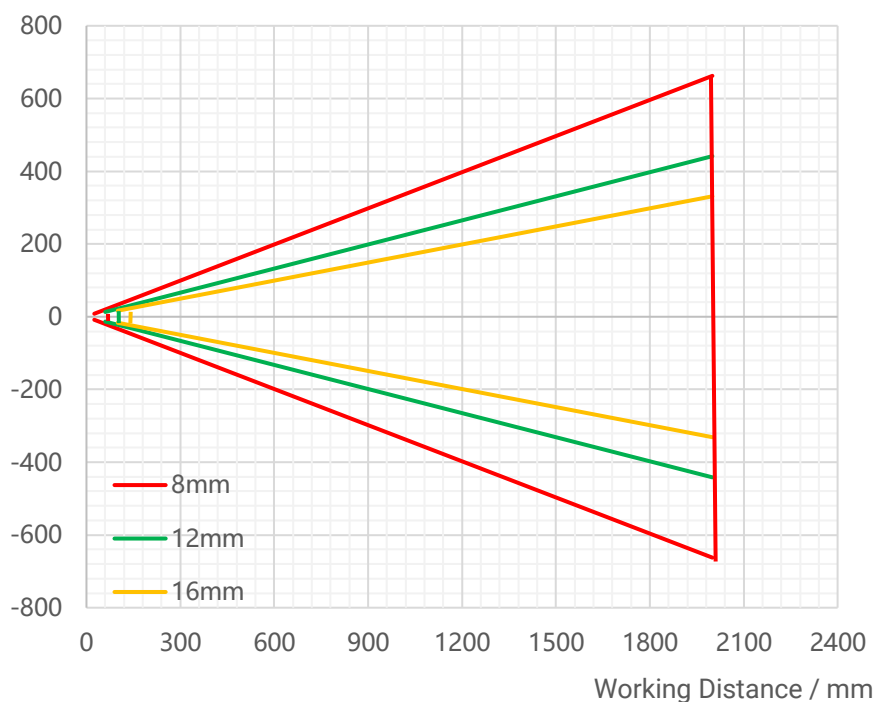

Device (Right Angle):

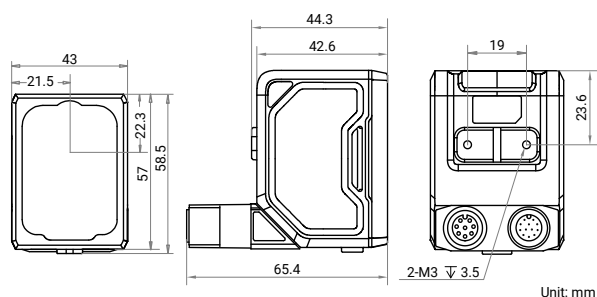

Unit: mm

Unit: mm

Technical drawing showing three views of the SPS-0600-0800-0900 connector with dimensions in mm:

- Front View (Left):** Shows a rectangular face with a central opening. Dimensions include a width of 43 mm, a base width of 49 mm, a height of 21.5 mm, a central opening height of 22.3 mm, a total height of 57 mm, and overall heights of 58.5 mm and 80.1 mm.
- Top View (Middle):** Shows the top surface with four circular features arranged symmetrically. Key dimensions include a total length of 146.3 mm, segment lengths of 40 mm and 45 mm, a distance of 42.6 mm from the right edge to the centerline, and radii of R24. Angles of 35° are indicated between dashed centerlines and the edges.
- Side View (Right):** Shows the profile of the connector. Dimensions include a total height of 50 mm, a mounting flange thickness of 23.6 mm, a base thickness of 25 mm, and a central feature height of 19 mm.

Unit: mm

Unit: mm

Unit: mm

Unit: mm

Technical drawing of a 102x50x42mm bracket. The drawing includes three views: a front view, a side view, and an end view.

Front View: The main view shows a 102x50mm bracket. It features a 6-Ø5.5 hole pattern (6 holes, Ø5.5mm diameter) arranged in a 3x2 grid. The horizontal spacing between the hole columns is 19.7mm, and the vertical spacing between the hole rows is 13.8mm. The bracket has a 45mm wide central section and 19.7mm wide end sections.

Side View: The side view shows the bracket's height of 42mm. It features a 6-Ø5.5 hole pattern (6 holes, Ø5.5mm diameter) arranged in a 3x2 grid. The horizontal spacing between the hole columns is 19.7mm, and the vertical spacing between the hole rows is 13.8mm. The bracket has a 45mm wide central section and 19.7mm wide end sections.

End View: The end view shows the bracket's width of 19mm. It features a 2-Ø3.5 hole pattern (2 holes, Ø3.5mm diameter) arranged in a 1x2 grid. The vertical spacing between the hole rows is 13.8mm. The bracket has a 45mm wide central section and 19.7mm wide end sections.

Unit: mm

Unit: mm

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
 Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.